

## AUDIO VISUAL ALARM

The Landon Kingsway Audible Visual Alarm Unit provides both an electronic sounder and a Xenon beacon unit, with a sounder 'mute' device.


The unit can be fitted in both 24V DC and 230V AC systems, covering a wide range of applications.

The Xenon beacon gives a flashing 'pulse' output and the electronic siren gives an intermittent tone @ 95 dB.

### Technical Specification

|                     |                         |
|---------------------|-------------------------|
| Enclosure           | Grey epoxy coated steel |
| Dimensions          | 170 x 150 x 60mm        |
| Protection Rating   | IP55                    |
| Conduit connection  | 2x 20mm knockouts       |
| Fixing Centres      | 2x Ø5mm                 |
| Voltage             | 24V DC or 230V AC       |
| Beacon              | Red Xenon, 2W           |
| Sounder             | 95 dB (A) ±3dB @1m      |
| Ambient Temperature | -10°C to 55°C           |
| Weight              | 0.8kg                   |

### Dimensions

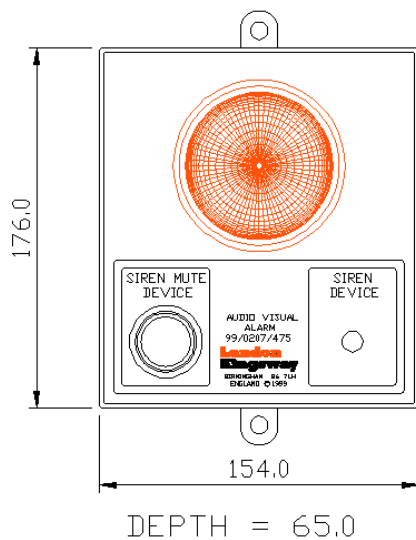

### INSTALLATION

The front of the unit is removable so ease of wiring can take place. Simple instructions are given on the inside of the unit so wiring can be complete quickly and efficiently. There are panel knockouts in the unit to provide a simple and neat method of cable entry.

The unit is easily mounted using the bracket that comes fitted as standard. Only two holes need to be drilled into the mounting surface.

Electrical connection is made via a terminal block at the base of the alarm unit. A full wiring diagram is supplied with the unit giving simple instructions.

Electrical installation should only be performed by suitably qualified persons.

If you have any questions or need any help then please contact our sales office.