LANDON KINGSWAY

Concentric Controls, Priory Road, Aston,
Birmingham. B6 7LH. England.
Tel: +44 (0)121 322 5002 Fax: +44 (0)121 322 5017
E-mail: sales@landonkingsway.com
A Division of Concentric Controls Ltd.

EMERGENCY PANIC BUTTON

The emergency panic button has a variety of uses where it is required to have a latching push button switch to sound an alarm or isolate equipment.

The switch has a normally closed contact which becomes open circuit on the switch being pressed and stays open until the button is reset.

Dimensions

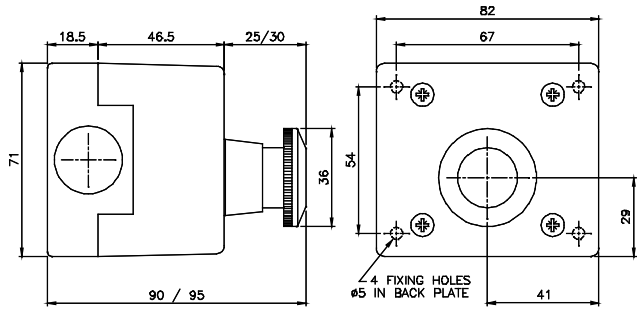

INSTALLATION

The switch should be situated in an accessible location and must be clearly marked as an emergency button.

Technical Specification

Enclosure	Grey ABS plastic with red button
Dimensions	82 x 71 x 95mm
Fixing centres	67 x 54mm Ø5mm
Protection rating	IP65
Switch rating	10A 250Vac
Wire size	2x 2.5mm²
Conduit connection	20mm
Weight	0.1kg

Four screw holes are provided in the base of the unit to allow wall mounting together with at pre-drilled conduit connection in one side of the enclosure. A cable gland is supplied which may be cut to suit cables from 6.0 to 16.0mm diameter.

Electrical connection of the switch should be carried out by competent persons in accordance with the wiring diagram.

Wiring Diagram

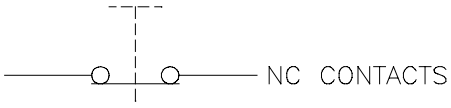

OPERATION

Once pressed the switch latches into position. To reset the switch, twist the serrated section of the knob in a clockwise direction.

If you have any questions or need any help then please contact our sales office.

Landon Kingsway part number 10 / 9038 / 02

For use with Solenoid Quick-Release, Fire Control Panel and any fire protection system.

Landon Kingsway are continually seeking to improve their range of products and reserve the right to change product specifications without prior notice.